
Wichard, 1 ZI de Felet, CS 50085, 63307 Thiers, France
Tél: +33 (0)4 73 51 65 00 — E-mail: marine@wichard.com

Double adjuster - Stock dia: 4 mm - Inner dia: 42 mm

Part #6771



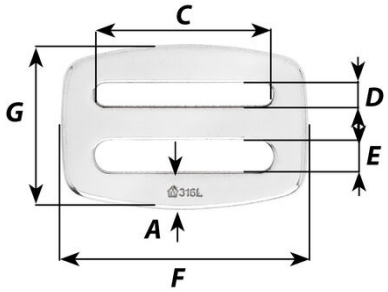

Description

Double adjusters (grade 316L stainless steel)
Increased working load limits
Stock diameter: 4 mm
Inside dimensions: 42 mm

Applications

Webbing applications

Technical information

	Materials	316L stainless steel grade
	Working load (kg)	350
	Breaking load (kg)	1550
	Weight (g)	51
	A (mm)	4*8
	C (mm)	41.5
	D (mm)	5
	F (mm)	58
	G (mm)	38

Caption

Working load (WL) : for nautical applications

Working Load Limit (WLL): for industrial applications only.
The safety factor is 5 times the breaking load.
WLL = Breaking load / 5

Wichard strives to ensure, to the best of its ability, the accuracy and the update of the information disseminated on this document, and reserves the right to correct at any time and without notice the content, as well as to evolve its products.

In the case of an industrial application, please contact our sales and technical department to validate the use of these products. The request for certificates can be made directly with the sales department when ordering the products.

Non-contractual pictures.

© Wichard 2026